



HARDWARE

REFERENCE DESIGN

[WWW.UNICORE.COM](http://WWW.UNICORE.COM)

# UC6580x-00

## Dual-Frequency GNSS Positioning Chip

Copyright© 2009-2025, Unicore Communications, Inc.  
Data subject to change without notice.

## Revision History

Version	Revision History	Date
R1.0	First release	Sep. 2023
R1.1	Updated the design related with V_BACK Updated the description of RTC in section 2.3 Updated the model to UC6580x-00 by adding the sub-model	Mar. 2024
R1.2	Updated the description of VBCKP in section 2.1	Mar. 2024
R1.3	Updated the voltage range of VMAIN to 1.7 V ~ 3.6 V Removed the information of backup battery	Feb. 2025
R1.4	Added requirements for the external RTC clock signal when connected to the RTC_I pin in section 2.3	Oct. 2025



## **Legal right notice**

This manual provides information and details on the products of Unicore Communication, Inc. ("Unicore") referred to herein.

All rights, title and interest to this document and the information such as data, designs, layouts contained in this manual are fully reserved, including but not limited to the copyrights, patents, trademarks and other proprietary rights as relevant governing laws may grant, and such rights may evolve and be approved, registered or granted from the whole information aforesaid or any part(s) of it or any combination of those parts.

Unicore holds the trademarks of "和芯星通", "Unicore", "UNICORECOMM" and other trade name, trademark, icon, logo, brand name and/or service mark of Unicore products or their product serial referred to in this manual (collectively "Unicore Trademarks").

This manual or any part of it, shall not be deemed as, either expressly, implied, by estoppel or any other form, the granting or transferring of Unicore rights and/or interests (including but not limited to the aforementioned trademark rights), in whole or in part.

## **Disclaimer**

The information contained in this manual is provided "as is" and is believed to be true and correct at the time of its publication or revision. This manual does not represent, and in any case, shall not be construed as a commitments or warranty on the part of Unicore with respect to the fitness for a particular purpose/use, the accuracy, reliability and correctness of the information contained herein.

Information, such as product specifications, descriptions, features and user guide in this manual, are subject to change by Unicore at any time without prior notice, which may not be completely consistent with such information of the specific product you purchase.

Should you purchase our product and encounter any inconsistency, please contact us or our local authorized distributor for the most up-to-date version of this manual along with any addenda or corrigenda.

## Foreword

This document gives the hardware reference design of the chip UC6580x-00 from Unicore.

### Target Readers

This document applies to technicians who possess the expertise on GNSS receivers.

# Contents

<b>1</b>	<b>Reference Design .....</b>	<b>1</b>
1.1	LDO Mode.....	1
1.2	DC/DC Mode.....	2
<b>2</b>	<b>Attention.....</b>	<b>3</b>
2.1	Power.....	3
2.2	Reset Signal .....	4
2.3	RTC.....	4
2.4	TCXO.....	5
<b>3</b>	<b>Recommended BOM.....</b>	<b>6</b>
	<b>Appendix: Simplest Design to Replace UC6226 .....</b>	<b>8</b>



## 1.2 DC/DC Mode

Under the DC/DC mode:

- DCDC\_IN and VDD\_IO use the same power supply;
- Use the internal DC/DC to power the system;
- Power the external TCXO by LDO\_X;
- Connect RTC crystal externally;
- Connect LNA and SAW externally;
- Use the UART interfaces to communicate;
- Lower power consumption but higher cost due to the use of power inductor comparing with the LDO mode.

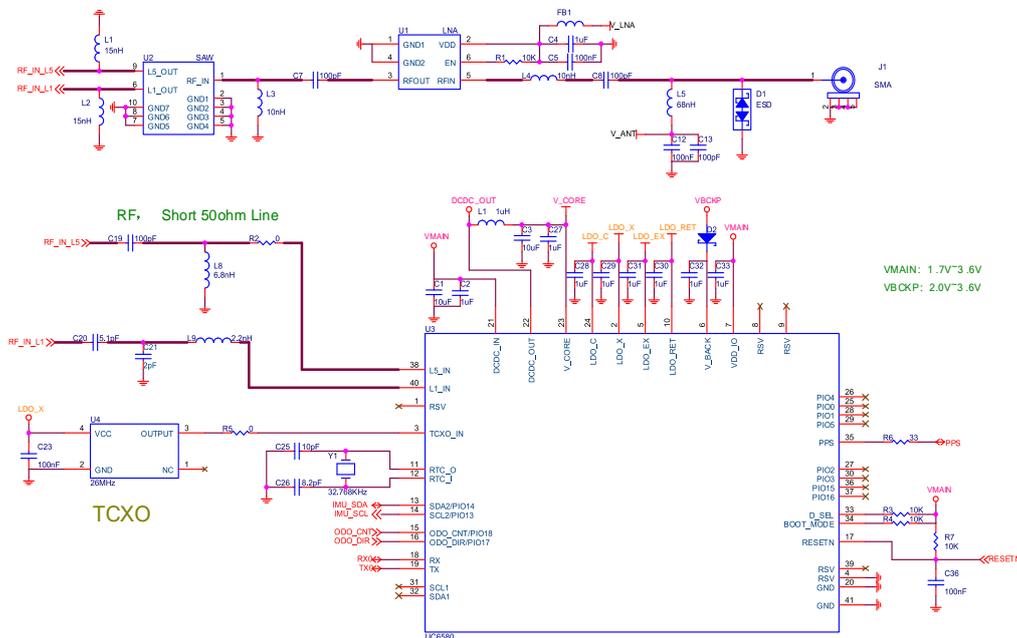


Figure 1-2 Reference design of DCDC mode

If the antenna feed supply and the chip's main supply use the same power rail, the ESD, surge and overvoltage generated at the antenna will be directly applied to the main supply, which may cause damage to the chip. Therefore, it is recommended to design an independent power rail for the antenna feed supply to reduce the possibility of chip damage.

# 2 Attention

## 2.1 Power

DCDC\_IN and VDD\_IO use the same external power supply. For all the power supplies, the ripple voltages must not exceed 50 mV.

To improve the product stability, it is recommended to control the UC6580x-00 power on and off by a host terminal. When an unstable factor out of control occurs, the terminal can perform power on/off operations on UC6580x-00 to make the system reset, which ensures continuous work of the system.


### Note:

#### VMAIN

- The VMAIN initial level when power-on should be less than 0.4 V.
- The VMAIN ramp when power-on should be monotonic, without plateaus.
- The voltages of undershoot and ringing should be within 5% VMAIN.
- VMAIN power-on waveform: The time interval from 10% rising to 90% must be within 100  $\mu$ s ~ 10 ms.
- Power-on time interval: The time interval between the power-off (VMAIN < 0.4 V) to the next power-on must be larger than 500 ms.

#### VBCKP

- The VBCKP initial level when power-on should be less than 0.4 V.
- The VBCKP ramp when power-on should be monotonic, without plateaus.
- The voltages of undershoot and ringing should be within 5% VBCKP.
- VBCKP power-on waveform: The time interval from 10% rising to 90% must be within 100  $\mu$ s ~ 10 ms.
- Power-on time interval: The time interval between the power-off (VBCKP < 0.4 V) to the next power-on must be larger than 500 ms.
- To prevent reverse current flowing from VMAIN to V\_BACK, the supply voltage of V\_BACK should be no lower than VMAIN or a forward biased diode should be added before V\_BACK. Meanwhile, make sure that the voltage of V\_BACK is within the range of 1.7 V to 3.6 V.

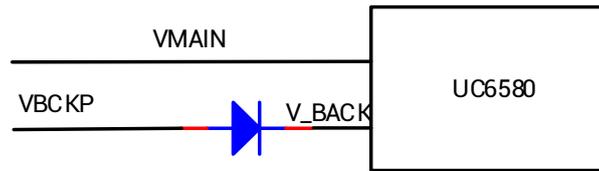

The diode is recommended to be of low power (mA-level forward current), low forward voltage drop (300 mV), and low reverse leakage current (< 100  $\mu$ A within the working temperature).

## 2.2 Reset Signal

UC6580x-00 supports system reset. The reset signal is active low and the active time should be no less than 5 ms.

## 2.3 RTC

RTC is usually driven by an on-chip 32.768 kHz oscillator, which needs to be connected to an external 32.768 kHz crystal. It supports three kinds of connections:

- 1) Use an external crystal, as shown in the schematic diagrams.
- 2) Use an external 32.768 kHz digital clock signal to directly input to RTC\_I, and it is recommended to do ESD protection at the RTC\_I pin. Make sure that the signal amplitude is less than 1.98 V, otherwise it may cause damage to the UC6580x-00 chip. Keep RTC\_O floating.

When using an external digital clock signal input to the RTC\_I pin, the power-on sequence of the external RTC clock must not be later than that of the V\_BACK and VDD\_IO of the UC6580x-00. This prevents potential damage to the external RTC clock chip, which could occur if the RTC\_I pin outputs a voltage while the external clock chip is not powered on.

- 3) When RTC is not used, keep RTC\_I floating and connect RTC\_O to ground to reduce the current leakage.

Special attentions should be paid to the layout and routing of RTC in addition to the general rules:

- Have a complete reference GND under the chip and the RTC crystal.
- The RTC crystal shall be placed as close to the chip as possible, and there shall be no other devices between the two.
- Devices, signals, wiring, etc. with high power or strong interference shall be avoided around the RTC crystal.
- It is recommended to do ground shields for the relevant circuits of RTC.

### 2.4 TCXO

The TCXO\_IN pin connects an external TCXO of 26 MHz. The power supply of TCXO can be LDO\_X or an external independent LDO power supply.

In order to ensure the chip boots normally, the 26 MHz clock is required to work stably no later than 10 ms after the chip is powered.

The basic parameter requirements for TCXO are as follows:

- Frequency and temperature: 26 MHz  $\pm$  0.5 ppm (-40 °C to +85 °C);
- Short-term frequency stability: < 5 ppb/s.

Special attentions should be paid to the layout and routing of TCXO in addition to the general rules:

- It is recommended to maintain the copper void for the layer where TCXO is placed and the adjacent layers, and keep the reference ground complete for other layers, to reduce the impact of heat conduction on the performance of TCXO.
- Place TCXO as close to the chip as possible, with ground shields for the surrounding circuits.
- Avoid placing any high-power or strong-interference devices, signals, traces, etc. around the TCXO. Keep a distance of more than 3 times the trace width between the clock signal trace and other traces.

### 3 Recommended BOM

Table 3-1 Recommended BOM

Category	Description	Type	Manufacturer
Capacitor	0402 surface mount capacitor 10 $\mu$ F, $\pm$ 20%, X5R, 6.3 V	CC0402MRX5R5BB106	YAGEO
Capacitor	0201 surface mount capacitor 1 $\mu$ F, $\pm$ 20%, X6S, 6.3 V	GRM033C80J105ME05D	Murata
Capacitor	0201 surface mount capacitor 100 nF, $\pm$ 10%, X7S, 10 V	C0603X7S1A104K030BC	TDK
Capacitor	0201 surface mount capacitor 100 pF, $\pm$ 10%, X7R, 25 V	CC0201KRX7R8BB101	YAGEO
Capacitor	0201 surface mount capacitor 10 pF, $\pm$ 2%, COG, 50 V	GRM0335C1H100GA01D	Murata
TVS	ESD protective diode DFN0603-2L 1100 W $\pm$ 18 kV	JEB05UCDS-AH	JIEJIE MICROELECTR ONICS CO. , Ltd
Ferrite Bead	Ferrite Bead BLM15AG221SN1D	BLM15AG221SN1D	Murata
Inductor	Chip inductor: 1 $\mu$ H DC resistor: 300 m $\Omega$ Maximum current: 0.7A Tolerance: $\pm$ 20% Size: 1.6 mm $\times$ 0.8 mm $\times$ 0.95 mm	MLP1608V1R0BT0S1	TDK
Resistor	Surface Mount 0 $\Omega$ , 1/16 W, $\pm$ 5%, 0402	RC0402JR-070RL	YAGEO
Resistor	Chip resistor 0 $\Omega$ , 1/20W, $\pm$ 1%, 0201	RC0201FR-070RL	YAGEO

## UC6580x-00 Hardware Reference Design

Category	Description	Type	Manufacturer
Resistor	Chip resistor 10 k $\Omega$ , 1/16 W, $\pm$ 5%, 0402	RC0402JR-0710KL	YAGEO
Resistor	Chip resistor 10 k $\Omega$ , 1/20 W, $\pm$ 1%, 0201	RC0201FR-0710KL	YAGEO
Resistor	Chip resistor 4.7 k $\Omega$ , 1/16 W, $\pm$ 5%, 0402	RC0402JR-074K7L	YAGEO
Resistor	Chip resistor 4.7 k $\Omega$ , 1/20 W, $\pm$ 5%, 0201	AC0201JR-074K7L	YAGEO
Resistor	Chip resistor 33 $\Omega$ , 1/16 W, $\pm$ 5%, 0402	RC0402JR-0733RL	YAGEO
LNA	High gain, dual-band LNA LGA 6-pin	MXDLN14TP	MAXSCEND
SAW	1.5 mm $\times$ 1.1 mm 1166 MHz to 1187 MHz 1559 MHz to 1606 MHz L1: 2.4 dB Max. L5: 2.0 dB Max. L1: 50 MHz L5: 20 MHz	MXDFD14A1	MAXSCEND
TCXO	$\pm$ 0.5 ppm 26 MHz 2.0 mm $\times$ 1.6 mm $\times$ 0.73 mm	X1G005441020416	EPSON
Crystal	32.768 KHz $\pm$ 20 ppm -40 $^{\circ}$ C to +85 $^{\circ}$ C	1TJG125DR1A0004	KDS
Crystal	32.768 KHz $\pm$ 20 ppm 12.5 pF -40 $^{\circ}$ C to +85 $^{\circ}$ C	X1A000061000200	EPSON

# Appendix: Simplest Design to Replace UC6226

UC6580x-00 can replace the UC6226 (QFN40) in the circuits. If your product uses UC6226 (QFN40), you can upgrade it with UC6580x-00. Please contact Unicore FAE if necessary.

This section introduces the simplest way to fulfill the replacement. You can design your circuits according to Figure 0-1 and Table 0-1. Except the pins listed in Table 0-1, other pins of the UC6580x-00 (QFN40) and UC6226 (QFN40) are the same. Moreover, please pay attention to the followings:

- DCDC\_IN and VDD\_IO use the same power supply.
- Adjust the values of RF\_IN matching inductor (L3) and RF\_IN matching capacitor (C14).
- Adjust the value of DCDC output inductor (L2).

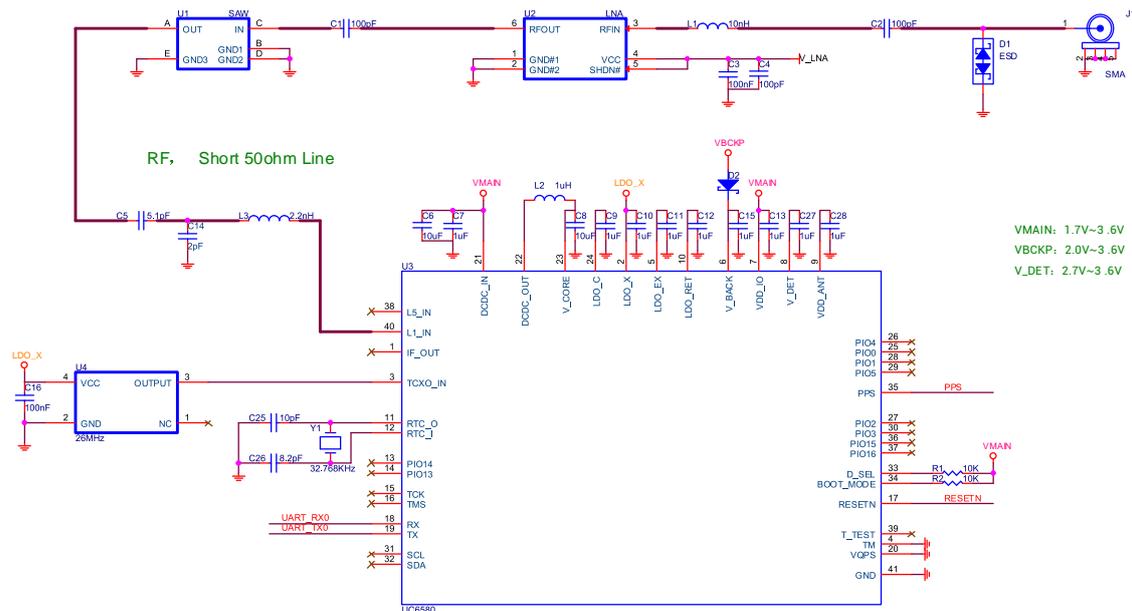


Figure 0-1 Simplest design to replace UC6226

## UC6580x-00 Hardware Reference Design

Table 0-1 Simplest design to replace UC6226

Pin No.	UC6226NI/AS	UC6580x-00	Description
1	VDD_ANA	IF_OUT	UC6580x-00: floating Not compatible
4	XTAL_O	TM	Both floating Compatible
5	LDO_F_OUT	LDO_EX	Both connect a 1 $\mu$ F capacitor externally Compatible
8	PIO17	V_DET	UC6580x-00: can be floating or connect a 1 $\mu$ F capacitor externally Partially compatible
9	NC	VDD_ANT	UC6580x-00: can be floating or connect a 1 $\mu$ F capacitor externally Partially compatible
10	PIO18	LDO_RET	UC6580x-00: connects a 1 $\mu$ F capacitor externally Not compatible
20	T_SENSE	GND	UC6580x-00: connects Ground Not compatible
22	V_DCDC_OUT	DCDC_OUT	UC6580x-00: L2 = 1 $\mu$ H, C8 = 10 $\mu$ F Not compatible
38	LDO_RF_OUT	L5_IN	UC6580x-00: connects RF signals if L5 channel is used, otherwise floating Not compatible
39	VDD_LNA	T_TEST	UC6580x-00: internal test pin, floating Not compatible
40	LNA_IN	L1_IN	UC6580x-00: L3 = 2.2 nH, C14 = 2.0 PF Not compatible

和芯星通科技（北京）有限公司

**Unicore Communications, Inc.**

北京市海淀区丰贤东路 7 号北斗星通大厦三层  
F3, No.7, Fengxian East Road, Haidian, Beijing, P.R.China,  
100094

[www.unicore.com](http://www.unicore.com)

Phone: 86-10-69939800

Fax: 86-10-69939888

info@unicorecomm.com



[www.unicore.com](http://www.unicore.com)